KAVAATA® VALVES

# TWO PIECE DESIGN SCREWED END BALL VALVE

- LOW TORQUE
- BUBBLE TIGHT SHUT OFF
- ECONOMICAL
- BI-DIRECTIONAL
- DESIGN AS PER ASME B.16.34 STANDARD
- 100% TESTED AS PER ISO 5208:2008
- PRESSURE CLASS ASA 300# / PN40

*...from excellence to perfection*

# DIMENSIONS OF TWO PIECE DESIGN SCREWED END BALL VALVE

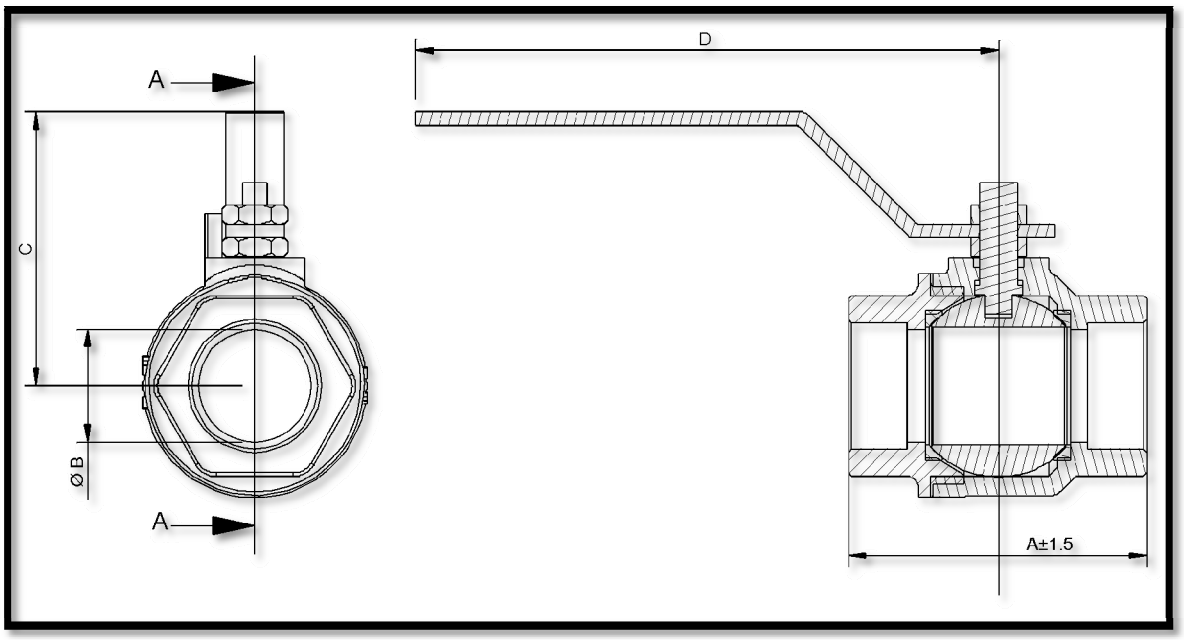


| SIZE | A±1.5 | Ø B | C | D | THREAD |
|---|---|---|---|---|---|
| DN 15 | 55 | 10 | 40 | 90 | G ½"/ NPT |
| DN 20 | 76 | 19 | 55 | 90 | G ¾"/ NPT |
| DN 25 | 85 | 25 | 95 | 195 | G 1"/ NPT |
| DN 40 | 114 | 38 | 108 | 255 | G 1 ½"/ NPT |
| DN 50 | 124 | 50 | 112 | 255 | G 2"/ NPT |

| ITEM | PART | MATERIAL | |
|---|---|---|---|
| 1 | Body | ASTM A351 Gr.CF8/ CF8M (1.4408) | Carbon steel/ ASTM A 216 Gr. WCB |
| 2 | Adapter | ASTM A351 Gr.CF8/ CF8M (1.4408) | Carbon steel/ ASTM A 216 Gr. WCB |
| 3 | Ball | SS304/ SS 316 | |
| 4 | Stem | SS304/ SS316 | |
| 5 | Seat | PTFE / RPTFE | |
| 6 | Seals | PTFE | |
| 7 | Gland | SS304 | |
| 8 | Lever | CS | |

**Rajeev & Company**
**423, Nazar Camp Cross 3,**
**Main Road Vadagaon**
**Belgaum-590005 INDIA**

**e-mail:**
**sales@kavaatavalves.com**

www.kavaatavalves.com

Distributed by:
ULTRAFLUXO Engenharia
Av. Das Américas , 14600 – bloco 01 – sala 309 – Recreio dos Bandeirantes
Rio de Janeiro – RJ – Cep: 22790-702 Tel: (21) 99333-3043
Email: contato@ultrafluxo.com.br Site: http://www.ultrafluxo.com.br