


KAVAATA®



VALVES




TWO PIECE DESIGN FLANGED END BALL VALVE

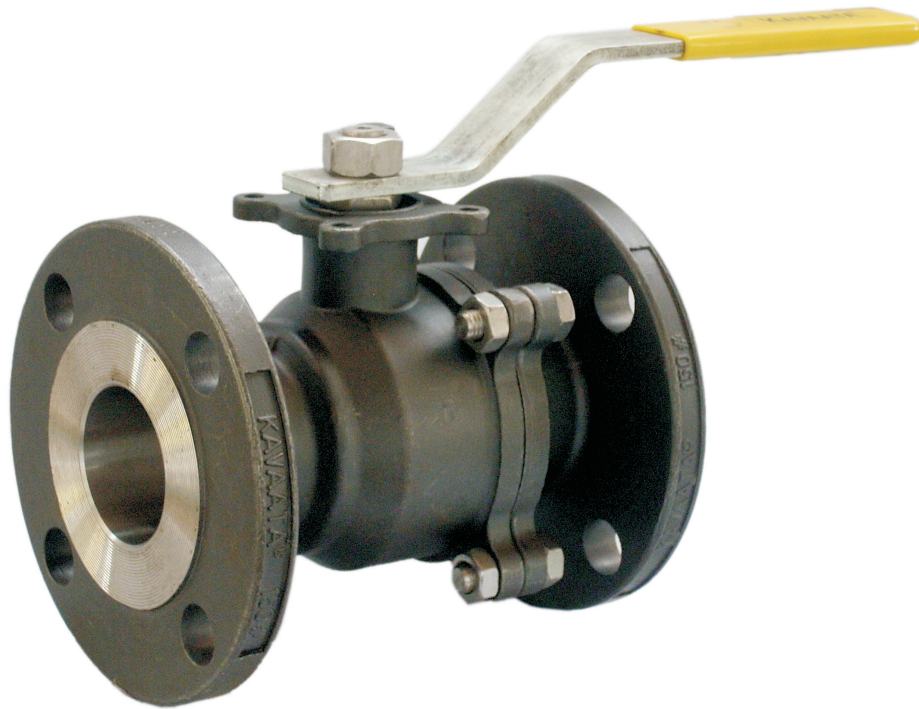

- LOW TORQUE
- BUBBLE TIGHT SHUT OFF
- ECONOMICAL
- UNI-DIRECTIONAL
- DESIGN AS PER ASME B.16.34 STANDARD
- 100% TESTED AS PER ISO 5208:2008
- PRESSURE CLASS ASA 150# / PN16

...from excellence to perfection

DIMENSIONS OF TWO PIECE DESIGN FLANGED END BALL VALVE

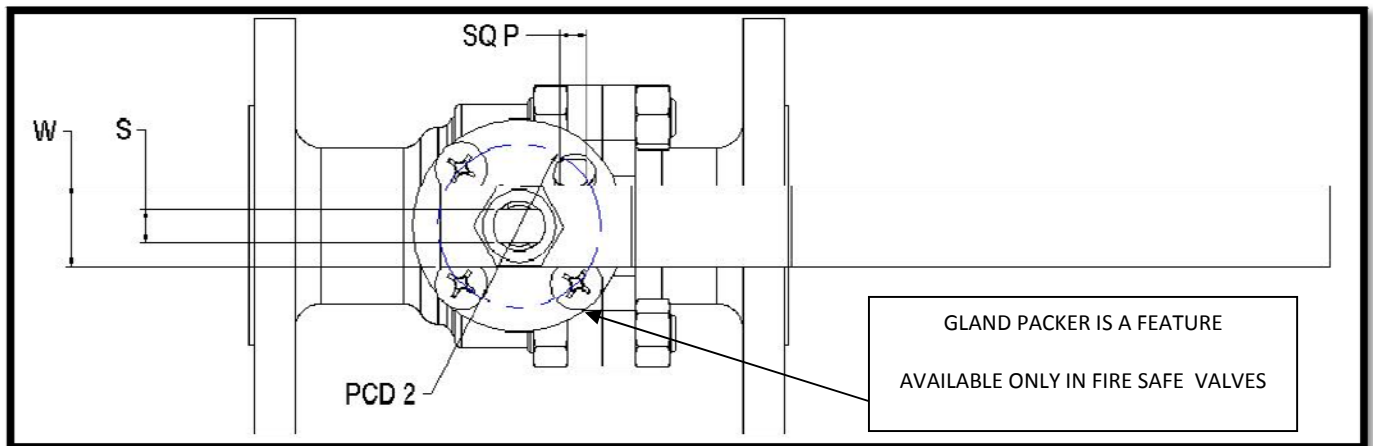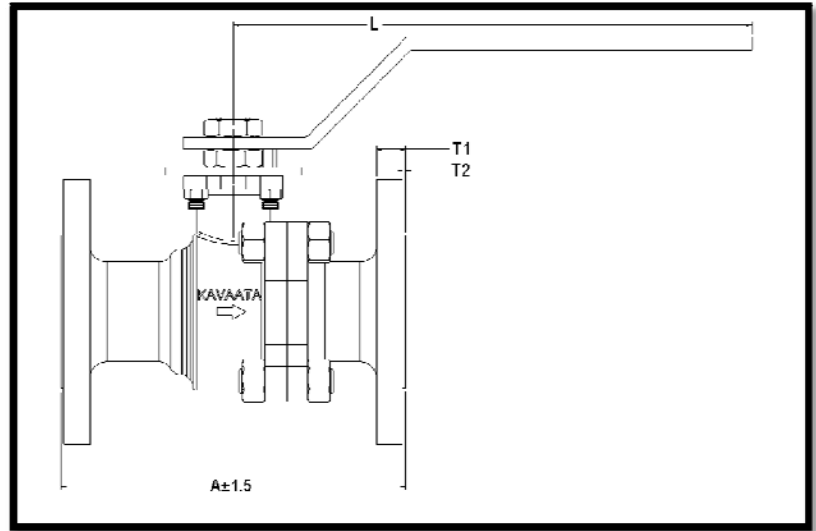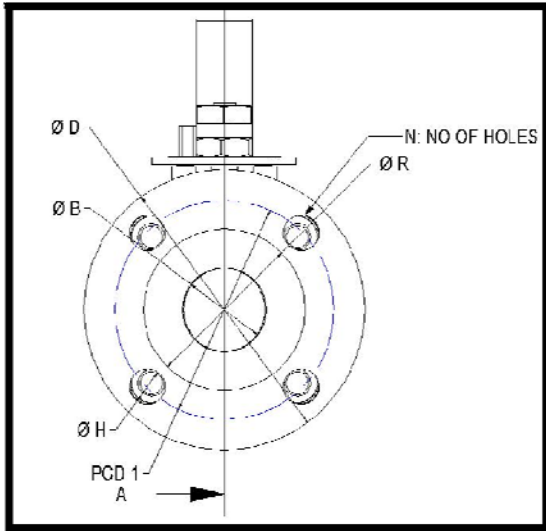


SIZE	A	Ø B	Ø D	Ø R	Ø H x N	PCD 1	T1	T2	L	W	PCD 2	SQ P
25FB	127	25	108	51	16 x 4	79.4	9.7	1.5	190	20	50	6
40FB	165	38	127	73	16 x 4	98.4	12.8	1.5	250	25	50	8
50FB	178	50	152.4	92	19 x 4	120.65	14.5	1.5	250	25	70	9
80FB	203	75	190.5	127	19 x 4	152.4	17.5	1.5	300	32	102	12
100FB*	229	100	229	157	19 x 8	190.5	22.3	1.5	400	32	102	12
150FB	267	150	279.4	216	22.3 x 8	241.3	24.9	4.5	NA	NA	125	NA

NOTE: ALL DIMENSIONS IN mm

* UNDER DEVELOPMENT

Fire safe feature can be provided in this series as an option

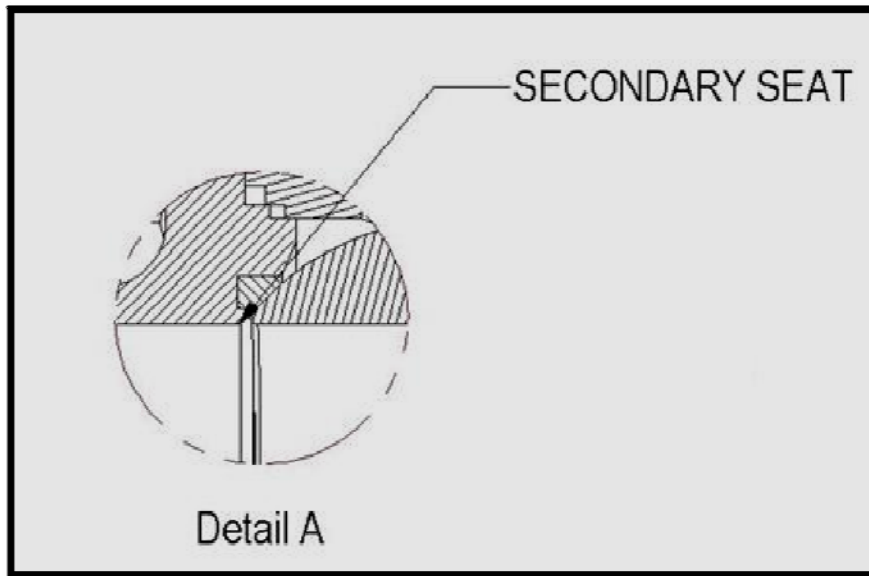

ITEM	PART	MATERIAL	
1	Body	ASTM A351 Gr.CF8/ CF8M	Carbon steel/ ASTM A 216 Gr. WCB
2	Adapter	ASTM A351 Gr.CF8/ CF8M	Carbon steel/ ASTM A 216 Gr. WCB
3	Ball	SS304/ SS 316	
4	Stem	SS304/ SS316	
5	Seat	PTFE / RPTFE	
6	Seals	PTFE	
7	Gland	SS304	
8	Lever	CS	

Rajeev & Company

423, Nazar Camp Cross 3,
Main Road Vadagaon
Belgaum-590005 INDIA

e-mail:

sales@kavaatavalves.com

Distributed by:



Engenharia

Av. Das Américas , 14600 – bloco 01 – sala 309 – Recreio dos Bandeirantes
Rio de Janeiro – RJ – Cep: 22790-702 Tel: (21) 99333-3043
Email: contato@ultrafluxo.com.br Site: <http://www.ultrafluxo.com.br>

www.kavaatavalves.com